



# KLAR



New





Apparecchio LED a parete e plafone da esterno (IP65). Struttura dalla forma rotonda o quadrata in materiale plastico e diffusore opale in PMMA per un effetto di luce diffusa. Proposto con switch dedicato alla regolazione della temperatura cromatica della luce (3000K-4000K-5700K) e switch per la scelta della potenza (13W-18W) a seconda delle esigenze. Disponibili giunti certificati IP68 per la realizzazione di connessioni elettriche, sicure, durevoli e con barriera anticondensa.



LED outdoor (IP54) wall and ceiling luminaire. Round or rectangular plastic structure, opal PMMA diffuser for diffused light emission. Available with switch allows to easily adjust the color temperature of the light (3000K-4000K-5700K), and switch to select the power (13W-18W) depending on the needs. IP68 linear connectors for moisture protection and anti-condensation linear joints are available.

# KLAR



New



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
<b>KLA001</b>	3000K	1360-1880	13W-18W	Ø280 x 50
	4000K	1485-2055	13W-18W	
	5700K	1420-1970	13W-18W	



Codice Code	CCT	Flusso lm Flux lm	Potenza Wattage	Dimensioni mm Dimensions mm
<b>KLA002</b>	3000K	1360-1880	13W-18W	280 x 280 x 50
	4000K	1485-2055	13W-18W	
	5700K	1420-1970	13W-18W	




Sistema di aggancio rapido  
Quick coupling system



Dotato di cavo di sicurezza in acciaio anticaduta  
Equipped with a steel safety cable


Switch per temperatura colore (3000K-4000K-5700K)  
Colour temperature switch (3000K-4000K-5700K)

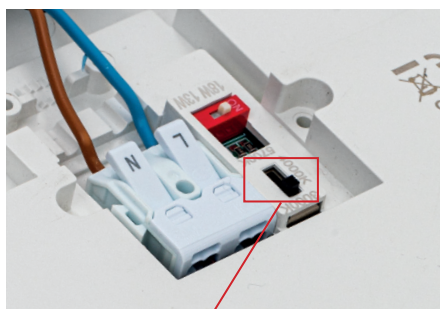

3000K 4000K 5700K



Switch per cambio potenza (13W-18W)  
Switch for power change (13W-18W)

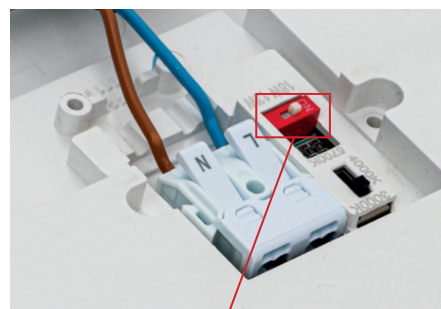

13W 18W



Finiture Finishes



Bianco White

Accessori Accessories



connessione IP68  
IP68 connection

p.897